

CONTI®V FO PIONEER


Transversely stiff raw-edge EPDM heavy-duty V-belts for powerful, sustained power transmission with enhanced running smoothness, according to DIN 7753

Properties:

- temperature range from -40°C to +120°C
- very good flexibility thanks to molded teeth
- high dynamic stability
- enhanced running smoothness through inverted production process
- matched-set L=L (from 1000 mm)
- electrically conductive to ISO 1813
- conditionally resistant to oil
- suitable for tropical climates
- dust-proof




Belt structure:

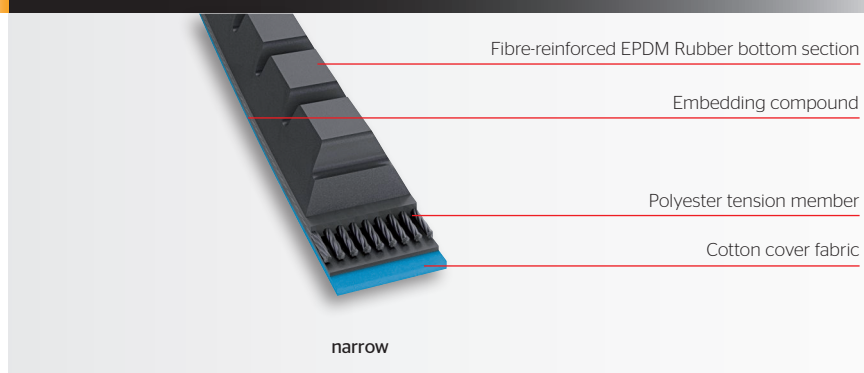

Profile	Length range L _d (mm)
XPZ / 3VX	512 - 2840
XPA	590 - 2932
XPB / 5VX	1000 - 2900
XPC	1900 - 2900

Comparison of products:

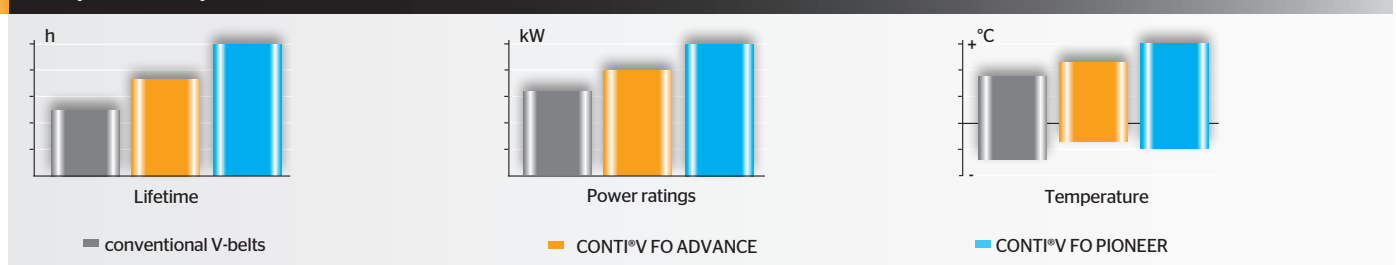

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en

